

PAR (Photosynthetically Active Radiation)




Quantum Sensor - Full Spectrum

We offer the **Apogee Full Spectrum Quantum Sensor** for accurate measurement of PAR (Photosynthetically Active Radiation). It provides research-grade measurements under all light sources, including LEDs. The sensor housing features a fully potted, dome-shaped head, making the sensor completely weatherproof for self-cleaning. The improved spectral response increases the accuracy of LED measurements. See the graph below. *Shown above with optional leveling unit sold separately.*



Dimensions 37 mm (L) x 24 mm (Dia)
Cable Length 5 m
Weight 90 g
Range 0 - 3000 $\mu\text{mol m}^{-2} \text{s}^{-1}$
Calibration Uncertainty $\pm 5\%$
Measurement Repeatability <1%
Long-Term Drift < 2% per year

Operating -40 °C to 70 °C; 0 to 100% relative humidity; can be submerged in water up to depths of 30 m
Spectral Range 389 to 692 nm ± 5 nm (wavelengths where response is greater than 50%)

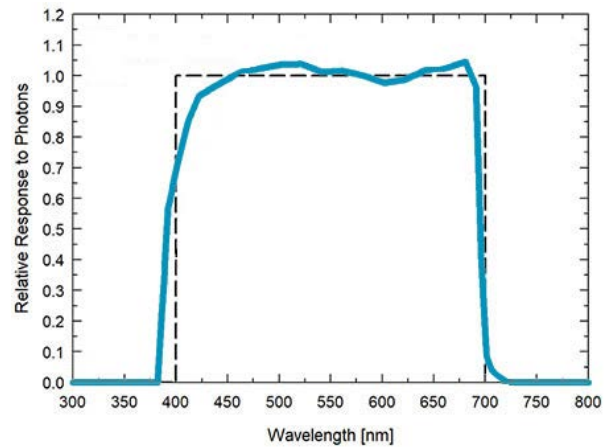

TARGAS-1

EGM-5

The Apogee Full Spectrum Quantum Sensor is compatible with the TARGAS-1 Portable Photosynthesis System and the EGM-5 Portable CO₂ Gas Analyzer.

For further information, please contact us at:



110 Haverhill Road, Suite 301
 Amesbury, MA 01913 U.S.A.
TEL +1 978-834-0505
FAX +1 978-834-0545
EMAIL sales@ppsystems.com

- PP Systems is a registered trademark of PP Systems, Inc.
- PP Systems is continuously updating its products and reserves the right to amend product specifications without notice.
- All brand names are trademarks of their respective owners.

pp_systems

ppsystemsinc

company/pp-systems

ppsystemsinc

ppsystems.intl